

Pluribus Open Netvisor[®] Linux for Dell Open Networking – Enterprise Edition

Operating System for Dell Open Networking Switches

Go Beyond Traditional Datacenter Networking

The challenge for enterprise data centers is facing increasing network demands of traffic and connectivity and expectations – but traditional networking infrastructure is expensive, hardware-bound, inflexible and hard to manage.

Pluribus Open Netvisor[®] Linux (ONVL) for Dell Open Networking (ON) Enterprise Edition is designed to run your Layer 2 and Layer 3 networking both more efficiently and at a lower cost than traditional switching infrastructure. ONVL Enterprise Edition on Dell is a disaggregated best-of-breed solution. ONVL literally is Linux, and Dell ON Ethernet switches are designed to deploy modern workloads and applications for the open networking era.


Pluribus Open Netvisor[®] Linux (ONVL)

Pluribus Networks advances software-defined networking (SDN) through Open Netvisor Linux (ONVL), the industry’s most programmable, open source-based network operating system. ONVL is based upon the Pluribus Virtualization-Centric Fabric[™] (VCF[™]) architecture, a proven approach to understanding flow, rapidly responding to business needs and securing your data.

Pluribus ONVL combines the benefits of Linux with a traditional CLI (Command Line Interface) paired with programmability (C, RESTful API) and DevOps tools (e.g. Ansible) for agility and automation via a single point of management.

The Dell ON Ethernet Switches, based on the latest generation chipsets from Broadcom, are designed to implement extremely cost effective, non-blocking, pay-as-you-grow leaf-spine architecture with predictable low-latency thus dramatically improving workload management and network agility.

In combination with the Dell Open Networking (ON) switching portfolio, ONVL provides best-in-class switching economics. The deployment flexibility is guaranteed by Pluribus ONVL full L2/L3 protocol suite providing complete interoperability with the legacy networking infrastructure – allowing for easy insertion into brownfield deployments.

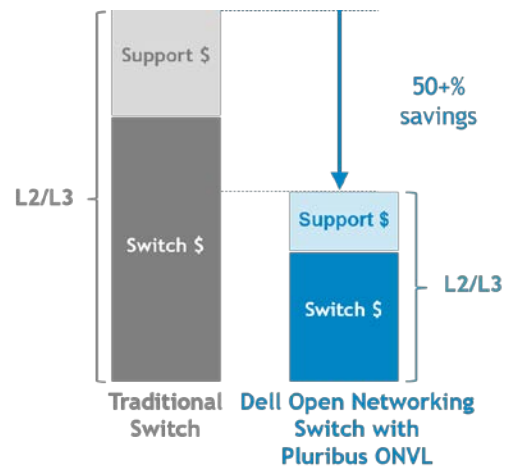

Benefits

- Open source and commercial Linux applications can run natively helping avoid vendor lock-in
- Fully extensible with DevOps – RESTful and C-based API and Ansible facilitate rapid application development and rollout
- Best in-class hardware economics with Dell Open Networking hardware platforms
- Significant CapEx savings versus traditional networking infrastructure

Features

- Feature-rich L2/L3 and multicast protocols suite enable flexible deployment options.
- Management can be done via CLI and/or RESTful API
- Support for Ansible and Puppet automation:
 - Zero Touch Provisioning
 - Zero touch L2/L3 fabric provisioning
- Monitoring and troubleshooting options include SNMP, Syslog, sFlow, IPFIX and Mirroring (over VLAN and over IP)

Enterprise Networking - Detailed Functionality

Functionality	Description
Operating System Install & Upgrade	ONIE boot using DHCP & USB Offline Software Upgrade Online Software Upgrade
Extensibility	CLI RESTful, C, and Java API API and CLI install on any Linux server for centralized management and automation Ansible & Puppet automation modules
Layer 3 Features	Quagga IPv4 routing suite including OSPFv2, BGPv4, and RIP Equal-Cost Multi-Path (ECMP) VRRP Bidirectional Forwarding Detection (BFD) for BGPv4 Static Routes Loopback Interface DHCP Relay Quagga Direct Access via Shell
Layer 2 Features	Bridge management with RSTP (IEEE 802.1w) and RSTP PortFast MSTP (IEEE 802.1s) STP Cluster Awareness BPDU Guard, BPDU Filter VLANs, VLAN Trunks (IEEE 802.1q), LACP (IEEE 802.3ad) LLDP (IEEE 802.1ab) Link Aggregation Group (LAG) Multi-chassis LAG (vLAG) Storm control for Multicast and Broadcast IGMPv2/v3 snooping MLD Snooping Jumbo Frames
Management	Linux Management Tools – Perl, Python, etc SSHv2 TLS 1.2 Banner & MOTD IPv6 for Management
Monitoring & Troubleshooting	Traditional monitoring with SNMP v1, v2, and v3 Network specific MIB, ACL-based counters Port Mirroring Port Mirroring to Remote Host (PMRH) Encapsulated Port Mirroring to Remote Host (EPMRH) Troubleshooting with syslog, hardware inventory, and log files sFlow Traceroute
Security Features	MAC Security (vFlow based) Control Plane Traffic Protection (CPTP) Flow level security (vFlow ACL with drop, log, mirror actions) L2 and L3 ACL TACACS+ MD5 (BGPv4)
QoS Features	Layer 2 Class of Service (CoS) (IEEE 802.1p) Differentiated Services Code Point (DSCP) DSCP to CoS mapping CoS to DSCP Mapping QoS Strict Priority Queue Egress per port rate limiting Cos-toToS/ToS-to-CoS Mapping

ONVL Scalability – Tested & Verified

Performance	S4048-ON	S4048T-ON	S6000-ON	S6010-ON
MAC Addresses	16,000	16,000	16,000	16,000
IPv4 Routes	8,000	8,000	8,000	8,000
RSTP Instances	256	256	256	256
VLANs	256	256	256	256
VLANs (with MST)	50	256	50	256
MST Instances	20	20	20	20
Link Aggregation Group (LAG)	4	10	4	10
Member ports per LAG	16	2	16	2
Multi-chassis LAG (vLAG)	8	8	8	8
Member ports per vLAG	8	4	8	4
IGMP Groups	1,000	1,000	1,000	1,000
MLD Groups	1,000	1,000	1,000	1,000
Traffic Mirroring	4 ports	2 ports	4 ports	2 ports
Jumbo Frames	10,232 bytes	9612 bytes	10,232 bytes	9,612 bytes
ACL Entries	250	250	250	50
vNIC (SVI)	64	64	64	64
VRRP	64	64	64	64
ECMP	6-way	6-way	6-way	6-way
IPv4 host table size	16,000	16,000	16,000	16,000
QoS Queues	8	8	8	8
Open TCP Connections by ONVL	16,000	16,000	16,000	16,000
Total TCP Connections by ONVL	64,000	64,000	64,000	68,000
TCP Connection Track Rate	5,000/sec	5,000/sec	5,000/sec	5,000/sec

ONVL Supported IEEE standards

IEEE Standards	Description
IEEE 802.1ab	LLDP
IEEE 802.1Qbb	Priority-based Flow Control
IEEE 802.1D	Spanning Tree Protocol
IEEE 802.3ad	Link Aggregation Control Protocol (LACP)
IEEE 802.3ae	10 Gigabit Ethernet
IEEE 802.3ba	40 Gigabit Ethernet
IEEE 802.1p	CoS Prioritization
IEEE 802.1W	Rapid Spanning Tree Protocol
IEEE 802.1Q	VLAN Tagging
IEEE 802.1s	MSTP
IEEE 802.3z	Gigabit Ethernet

ONVL Supported RFCs

Supported RFCs	Description
RFC 768	User Datagram Protocol (UDP)
RFC 791	IP
RFC 792	Internet Control Message Protocol (ICMP)
RFC 793	TCP
RFC 826	ARP
RFC 854	Telnet
RFC 959	FTP
RFC 1305	Network Time Protocol (NTP) Version 3
RFC 1519	Classless Interdomain Routing (CIDR)
RFC 1591	Domain Name System (DNS) Client
RFC 1724	RIPv2 MIB Extension
RFC 1812	IPv4 Routers
RFC 2236	Internet Group Management Protocol
RFC 2328	OSPF Version 2
RFC 2453	RIP Version 2
RFC 2519	A Framework for Inter-Domain Route Aggregation
RFC 3101	OSPF Not-So-Stubby-Area (NSSA) Option
RFC 3137	OSPF Stub Router Advertisement
RFC 3376	Internet Group Management Protocol
RFC 3509	Alternative Implementations of OSPF Area Border Routers
RFC 4271	BGPv4
RFC 4456	BGP Route Reflection
RFC 4486	Subcodes for BGP Cease Notification Message
RFC 4893	BGP Support For Four-Octet AS Number Space
RFC 7011	IP Flow Information Export (IPFIX)

ONVL supported MIBs

Supported MIBs	Description
RFC 1155	SMI
RFC 1157	SNMPv1
RFC 1212, 1213, 1215	MIB-II, Ethernet-like MIB and TRAPs
RFC 1901	Introduction to Community-based SNMPv2
RFC 2011	SNMPv2 for Internet Protocol using SMIv2
RFC 2012	SNMPv2 for Transmission Control Protocol using SMIv2
RFC 2013	SNMPv2 for User Datagram Protocol using SMIv2
RFC 2233	The Interfaces Group MIB using SMIv2
RFC 2287	System Application Packages MIB
RFC 2570	Introduction to Version 3 of the Internet standard Network Management Framework
RFC 2571	An Architecture For Describing SNMP Management Frame works (read-only access)
RFC 2572	Message Processing and Dispatching for the SNMP (read only access)
RFC 2576	Coexistence between SNMP v1, v2, and v3
RFC 2578	SNMP Structure of Management Information MIB
RFC 2579	SNMP Textual Conventions for SMIv2
RFC 2580	Conformance Statements for SMIv2
RFC 2665	Ethernet like Interface MIB

Ordering Information

Product	Part Number	Description
Pluribus ONVL Enterprise Edition for 10 Gig Switches	ONVL-10G-ENT-LIC	Pluribus Open Netvisor Linux Enterprise Edition License for 10 Gig Switches
	ONVL-10G-ENT-SVC-1YR	Pluribus 24/7 1 Year Support for ONVL-10G-ENT-LIC
	ONVL-10G-ENT-SVC-3YR	Pluribus 24/7 3 Year Support for ONVL-10G-ENT-LIC
	ONVL-10G-ENT-SVC-5YR	Pluribus 24/7 5 Year Support for ONVL-10G-ENT-LIC
	ONVL-10G-SSC-1YR-ENT	Pluribus Open Netvisor Linux Enterprise Edition 1 Year Subscription for 10 Gig Switches
	ONVL-10G-SSC-3YR-ENT	Pluribus Open Netvisor Linux Enterprise Edition 3 Year Subscription for 10 Gig Switches
	ONVL-10G-SSC-5YR-ENT	Pluribus Open Netvisor Linux Enterprise Edition 5 Year Subscription for 10 Gig Switches
Pluribus ONVL Enterprise Edition for 40 Gig Switches	ONVL-40G-ENT-LIC	Pluribus Open Netvisor Linux Enterprise Edition License for 40 Gig Switches
	ONVL-40G-ENT-SVC-1YR	Pluribus 24/7 1 Year Support for ONVL-40G-ENT-LIC
	ONVL-40G-ENT-SVC-3YR	Pluribus 24/7 3 Year Support for ONVL-40G-ENT-LIC
	ONVL-40G-ENT-SVC-5YR	Pluribus 24/7 5 Year Support for ONVL-40G-ENT-LIC
	ONVL-40G-SSC-1YR-ENT	Pluribus Open Netvisor Linux Enterprise Edition 1 Year Subscription for 40 Gig Switches
	ONVL-40G-SSC-3YR-ENT	Pluribus Open Netvisor Linux Enterprise Edition 3 Year Subscription for 40 Gig Switches
	ONVL-40G-SSC-5YR-ENT	Pluribus Open Netvisor Linux Enterprise Edition 5 Year Subscription for 40 Gig Switches

About Pluribus Networks

Pluribus Networks provides fabric networking and analytics solutions that transform existing network infrastructures from being rigid, costly and complex, into a foundation for modern digital-centric businesses. Our Virtualization-Centric Fabric (VCF™) provides unprecedented insight, agility and security to create the industry's only combined SDN and Network Performance Monitoring (NPM) offering.

Learn more at www.pluribusnetworks.com/dell and [@pluribusnet](https://twitter.com/pluribusnet).

Open Netvisor® Linux - Release 2.5.2